



**Specifications FX150** 


(Free on wheels)	15 Tonnes	Wheel base Wheel track	4150 mm Front 1900 mm Rear 1800 mm
ENGINE Rated Power	Tata 4 cylinder, water cooled diesel engine or equivalent engine 49 hp (36 Kw) at 2000 RPM	HOIST	Winch is driven by hydraulic motor and fitted with rope tensioner. Hoisting is
			provided through self adjusting hook block employing 4 falls of 13 mm dia rope
STEERING	Full power orbitrol with twin hydraulic double acting cylinders and 40° articulation on either side	Hoist Speed	50 Mtrs./Min. (Line speed)
Turning Radius	7 mtrs (approx)	BOOM LUFFING Range	-3° to + 75°
TRANSMISSION	Heavy duty TATA synchromesh transmission with 8 forward and 2 reverse speeds and hi-low drive selector for creep speed Front axle is rigidly welded on the	SAFETY	<ul> <li>Hose failure protection</li> <li>Audio over hoisting indication</li> <li>Safety brakes on hoist</li> <li>Self adjusting hook block</li> <li>Front and rear wheel guards</li> </ul>
	chassis and rear drive axle is mounted with leaf springs  Heavy duty hydraulic clutch	STANDARD EQUIPMENT	<ul> <li>Front mounted fully enclosed wide view cabin</li> </ul>
Top Speed	32 KMPH on even metaled road (without load)		<ul><li>Rear View Camera</li><li>Front work lights</li><li>Beacon rotating light</li></ul>
Gradeability	40% (unladen)		<ul> <li>Reflectors &amp; Rear View Mirrors</li> </ul>
HYDRAULIC SYSTEM	<ul> <li>Gear/Intra Vane type Main Pump</li> <li>Three spools control valve with built in Relief valve</li> <li>Suction line has 100 mesh size strainer while return line is fitted with 25 micron filter</li> <li>Two double acting lift cylinders, two double acting steering cylinders and one double acting extension cylinder</li> </ul>		Took Kit Cabin Fan Instrument Cluster: a) Water temperature b) Engine oil pressure c) Fuel Gauge d) RPM meter cum hour recorder e) Air Pressure Gauge Speedometer
BRAKES	<ul> <li>Dual Circuit Brakes</li> <li>Fully air actuated brakes on rear wheels and pneumatically assisted hydraulic brakes are provided on front wheels</li> <li>Parking brake is pneumatically operated, fail safe type</li> </ul>	OPTIONAL EQUIPMENT	<ul> <li>Fly jib: 2.7 Mtrs., 1.25 Tonnes Capacity</li> <li>Spark arrestor</li> <li>Safe load indicator/ LMI</li> <li>Over Hoist hydraulic cutoff</li> <li>Fire extinguisher</li> <li>Front outriggers</li> <li>Front and side Proximity Sensors</li> </ul>
ELECTRICAL SYSTEM	12V. Negative earth with 35 amp. Alternator & 75 amp. hr. battery		<ul><li>Cabin front glass protector</li><li>Helper/Slinger seat</li><li>4 part slotted boom (16.3 m)</li></ul>
TELESCOPIC BOOM	Three part slotted boom with hydraulically operated synchronized extensions		<ul><li>4 part slotted boom (18.9 m)</li><li>Variant Model : Tata 74 bhp</li><li>BSIV Engine</li></ul>
TYRES	11.00 x 20 (4 Nos.)	OPERATING WEIGHT	
THEO	14.00 x 25 (2 Nos.)	Total Weight	15220 Kgs.





ACE FX150 Model Crane fitted with 4 part slotted boom (16.3 Mtrs. height) (4th part power extended)

Max. capacity flyjib: 1.25 tonnesMax capacity manual extension: 2.0 Tonnes

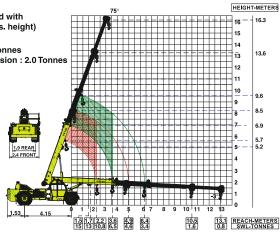

ALL DIMENSIONS IN METERS 59

Full rated lifting capacity available in articulated / steered condition.

Full rated lifting capacity available in articulated / steered condition.

NOTE: • All above specifications are pertaining to FX150 model fitted with 11.2 Mtrs. boom.
• Rated loads are on the basis of operation on firm and level surface.



CABIN

Front mounted, ergonomically designed Cabin for better visibility and driveability.



OPTIMIZED KINEMATICS AND LOW C.G.

FX150 crane has been designed with low Center of Gravity (C.G.) providing best in class stability and operational safety







**EASY MAINTENANCE** 

The engine is easily accessible for daily maintenance checks including battery, air filter, oil level and cooling system



**SLOTTED BOOM** 

Facilitates easier load positioning and is fitted with self adjusting hook



block.



INCREASED VISIBILITY

Bigger size front windscreen provided for better visibility and safe operation.



STEERING WHEEL & CONTROLS

Ergonomically placed operator console and instrument cluster ensures ease of operation.



**GROUND CLEARANCE** 

Ground clearance of 350mm for easier rough terrain operation.



HYDRAULIC & FUEL TANK Easy approach and High capacity.



**ENGINE** 

Best in class Tata-4 Cylinder engine having nationwide service support and spare parts availability.



#### FRONT OUTRIGGERS

Optional Front Outriggers for added safety during high lift operations.


# **BUILT TO PERFORM**





## NETWORK

# RELIABLE AND DEPENDABLE **EFFICIENCY**

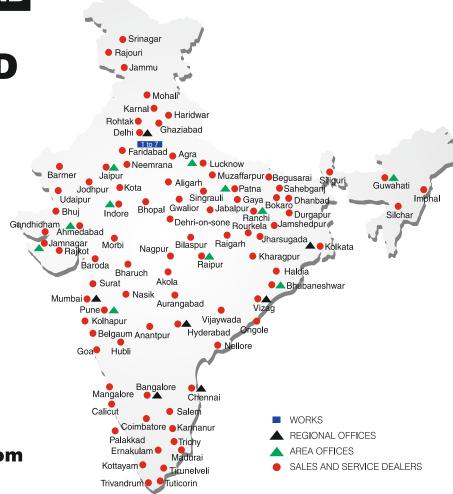



#### **MARKETING H.Q.** 4th Floor, Pinnacle

Surajkund, NCR-121009 Ph.: +91-129-4550000 Fax: +91-129-4550022 E-mail: marketing@ace-cranes.com

#### **REGISTERED OFFICE**

Dudhola Link Road, Dudhola Palwal-121102, Harvana Ph.: +91-1275-280111 Fax: +91-1275-280133

CIN: L74899HR1995PLC053860

#### **MUMBAI OFFICE**

31, "Kalpataru Court" Chembur, Mumbai - 400074 Ph.: +91-22-25206846, 25207070 Fax: +91-22-25207071

E-mail: acemumbai@ace-cranes.com

#### **KOLKATA OFFICE**

"Forma Towers" 84-A, Second Floor AJC Bose Road, Kolkata - 700014 Ph.: +91-9038070630

F-mail: acekolkatta@ace-cranes.com

#### **CHENNAI OFFICE**

1st Floor, "Alsa Regency", 165 Eldams Road, Alwar Pet Chennai - 600018

Ph.: +91-44-24314253 Fax: +91-44-24314252

E-mail: acechennai@ace-cranes.com

### **HERE TO SERVE YOU.**

#### SPARE PARTS & SERVICE

ACE has all India Sales and Service network operating out of all the major cities. These outlets are fully equipped to provide genuine spare parts and services by company trained engineers. These outlets are further supported by company officials based at Delhi, Mumbai, Chennai, Kolkatta, Ahmedabad, Surat, Pune, Jaipur, Chandigarh, Ranchi, Raipur, Indore, Bhubneshwar, Lucknow, Jamnagar, Hyderabad, Bangalore, Guwahati, Patna, Vizag & Kochi.



#### **Action Construction Equipment Ltd.**

Contact:

